


DATA SHEET


SCHOTT BG38

Optical properties		Mechanical properties		Colorimetric properties				
Reflection factor		Reference thickness						
P _d = 0,916		d = 1,00 mm						
Spectral values guaranteed		Density		Illuminant D65				
τ _i (350 nm) ≥ 0,8		ρ = 2,66 g/cm³			x	0,288	0,268	0,253
τ _i (405 nm) ≥ 0,93					y	0,328	0,326	0,323
τ _i (514 nm) ≥ 0,95					Y	83,2	76,4	70,8
τ _i (633 nm) ≤ 0,67					λ _d	491 nm	491 nm	490 nm
τ _i (694 nm) ≤ 0,32		Knoop hardness		P _e	0,092	0,164	0,223	
τ _i (1060 nm) ≤ 0,06		HK[0.1/20] = 472						
		Thermal properties		Illuminant A				
		Transformation temperature			x	0,413	0,384	0,360
		T _g = 482 °C			y	0,419	0,427	0,433
		Thermal expansion in 10 ⁻⁶ /K			Y	79,7	70,7	63,7
		α _(-30°C/+70°C) = 7,5			λ _d	501 nm	500 nm	500 nm
Refractive indices		α _(20°C/300°C) = 8,9		P _e	0,078	0,144	0,200	
n _F (486 nm) = 1,533								
n _e (546 nm) = 1,529								
n _d (587,6 nm) = 1,527								
Sellmeier coefficients								
valid from 440 nm to 1550 nm								
B ₁	0,3382							
B ₂	0,9643							
B ₃	1,7959							
C ₁	3,475E-03 μm²							
C ₂	1,0319E-02 μm²							
C ₃	190,755 μm²							
Internal quality								
Bubble class	2							
Chemical properties				Ionically colored glass				
Chemical resistance				Bandpass filter / Shortpass filter				
FR class = 0				NIR cutoff filter				
SR class = 2								
AR class = 2				ISO 23364:2021				
Resistance against humidity								
Sensitive glass								
see pocket catalogue "Optical Filter Glass 2024", chapter 5.5								
Disclaimer				All data without tolerances are to be understood to be reference values.				

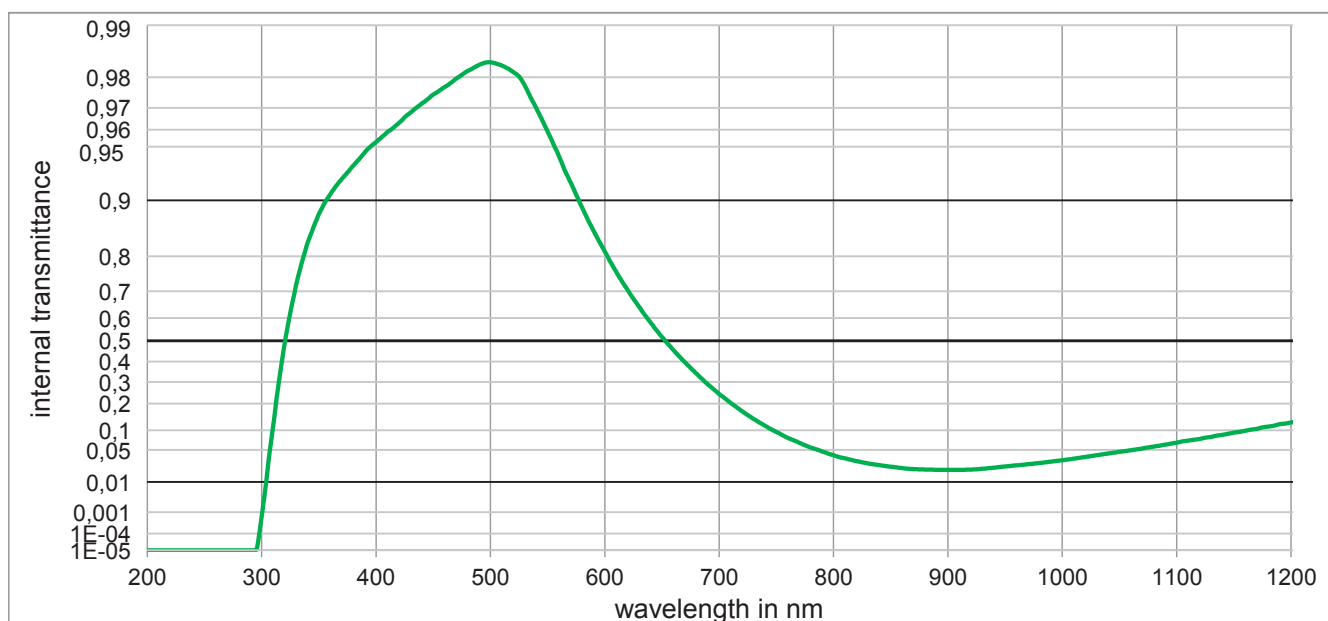

DATA SHEET

SCHOTT BG38

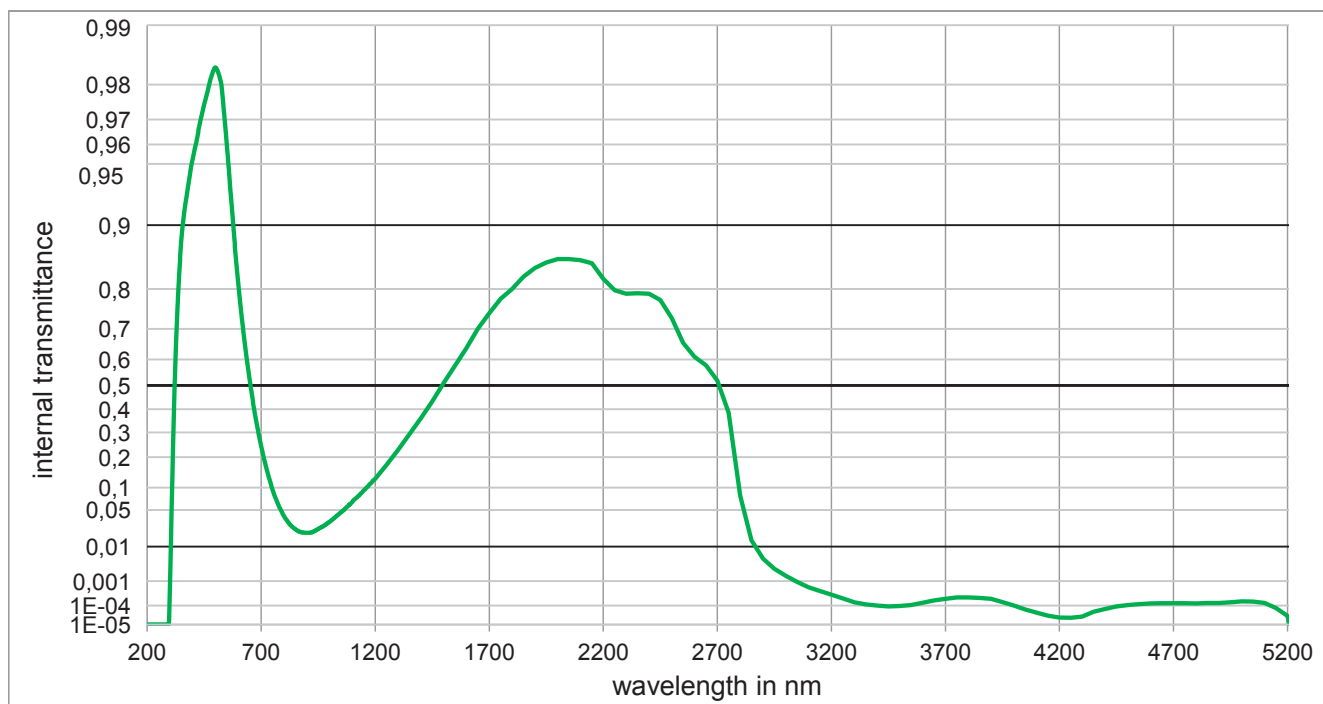

Internal transmittance τ_i at reference thickness

The internal transmittance values, tabulated and graphically represented, are reference values only

λ /nm	τ_i	λ /nm	τ_i	λ /nm	τ_i	λ /nm	τ_i	λ /nm	τ_i	λ /nm	τ_i
200	< 1,000E-05	500	9,836E-01	800	4,002E-02	1100	6,593E-02	2200	8,208E-01	3700	2,000E-04
210	< 1,000E-05	510	9,829E-01	810	3,491E-02	1110	7,111E-02	2250	7,973E-01	3750	2,296E-04
220	< 1,000E-05	520	9,813E-01	820	3,080E-02	1120	7,524E-02	2300	7,897E-01	3800	2,317E-04
230	< 1,000E-05	530	9,777E-01	830	2,761E-02	1130	8,054E-02	2350	7,907E-01	3850	2,193E-04
240	< 1,000E-05	540	9,700E-01	840	2,539E-02	1140	8,631E-02	2400	7,897E-01	3900	2,000E-04
250	< 1,000E-05	550	9,590E-01	850	2,341E-02	1150	9,319E-02	2450	7,756E-01	3950	1,449E-04
260	< 1,000E-05	560	9,430E-01	860	2,183E-02	1160	9,869E-02	2500	7,300E-01	4000	1,000E-04
270	< 1,000E-05	570	9,210E-01	870	2,077E-02	1170	1,044E-01	2550	6,569E-01	4050	6,471E-05
280	< 1,000E-05	580	8,910E-01	880	2,026E-02	1180	1,113E-01	2600	6,100E-01	4100	4,436E-05
290	< 1,000E-05	590	8,540E-01	890	2,000E-02	1190	1,198E-01	2650	5,786E-01	4150	3,090E-05
300	6,457E-04	600	8,110E-01	900	1,991E-02	1200	1,258E-01	2700	5,200E-01	4200	2,500E-05
310	1,140E-01	610	7,600E-01	910	1,996E-02	1250	1,715E-01	2750	3,854E-01	4250	2,410E-05
320	4,870E-01	620	7,040E-01	920	2,020E-02	1300	2,281E-01	2800	8,000E-02	4300	2,818E-05
330	7,180E-01	630	6,440E-01	930	2,103E-02	1350	2,931E-01	2850	1,384E-02	4350	5,047E-05
340	8,290E-01	640	5,810E-01	940	2,227E-02	1400	3,600E-01	2900	5,000E-03	4400	6,776E-05
350	8,813E-01	650	5,180E-01	950	2,371E-02	1450	4,335E-01	2950	2,547E-03	4450	9,036E-05
360	9,077E-01	660	4,560E-01	960	2,505E-02	1500	5,100E-01	3000	1,531E-03	4500	1,047E-04
370	9,239E-01	670	3,970E-01	970	2,650E-02	1550	5,768E-01	3050	9,290E-04	4550	1,169E-04
380	9,359E-01	680	3,410E-01	980	2,805E-02	1600	6,400E-01	3100	6,000E-04	4600	1,247E-04
390	9,460E-01	690	2,890E-01	990	3,000E-02	1650	7,000E-01	3150	4,236E-04	4650	1,294E-04
400	9,530E-01	700	2,430E-01	1000	3,196E-02	1700	7,436E-01	3200	3,000E-04	4700	1,294E-04
410	9,587E-01	710	2,030E-01	1010	3,434E-02	1750	7,784E-01	3250	2,133E-04	4750	1,282E-04
420	9,634E-01	720	1,680E-01	1020	3,707E-02	1800	8,000E-01	3300	1,422E-04	4800	1,259E-04
430	9,680E-01	730	1,390E-01	1030	4,006E-02	1850	8,246E-01	3350	1,138E-04	4850	1,330E-04
440	9,717E-01	740	1,150E-01	1040	4,300E-02	1900	8,400E-01	3400	1,000E-04	4900	1,330E-04
450	9,748E-01	750	9,500E-02	1050	4,610E-02	1950	8,491E-01	3450	9,120E-05	4950	1,409E-04
460	9,772E-01	760	7,800E-02	1060	4,929E-02	2000	8,548E-01	3500	9,550E-05	5000	1,560E-04
470	9,796E-01	770	6,600E-02	1070	5,297E-02	2050	8,548E-01	3550	1,057E-04	5050	1,531E-04
480	9,816E-01	780	5,500E-02	1080	5,700E-02	2100	8,529E-01	3600	1,358E-04	5100	1,318E-04
490	9,830E-01	790	4,700E-02	1090	6,123E-02	2150	8,482E-01	3650	1,694E-04	5150	7,516E-05